

**CABLE REEL WITH
 LAMPS**
 5000+328

ART. 5907/328 230V

length
15.5





Power supply
230V

Light source
FLUORESCENT

Degree of protection
IP55



IP55 IK07




DATI TECNICI AVVOLGICAVO

Article	Description	Cable length (m)	Reel cable length (m)	Cut length (m)	Cable type	Energy saving	Winder protection grade	Power supply voltage	Transformer features	Transformer
5907/328 230V	Cable reel + lamp fluo 328 230V	15.5	14	1.5	H05 RN-F - 2x1 mm ²	YES	IP42	230V	/	NO

DATI TECNICI LAMPADA

Lamp model	Light source	Power	Lamp protection grade	IK	Lux	Lumen
328 230V	FLUORESCENT	11 W	IP55	IK07	280 @ 50 cm	900

OVERALL DIMENSIONS

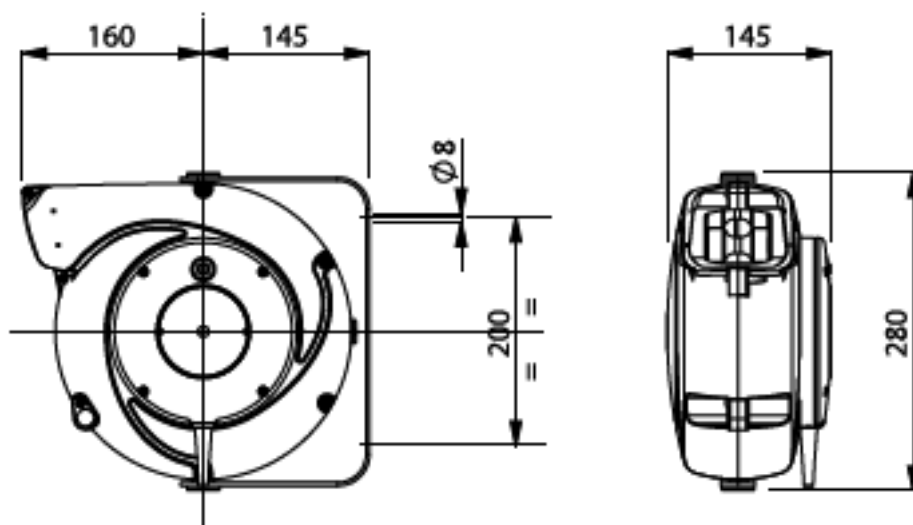

Technical features

Automatic cable reel, with spring recovery, complete with portable lamp, with or without transformer.

- Structure in shockproof plastic material.
- Metal fixing bracket, adjustable.
- Automatic device for stopping the cable at the desired length.
- High resistance cable recovery spring.
- Sliding contacts with collector ring and brushes.
- Ambient temperature of use: -5 / + 50 ° C.

Technical characteristics of the lamp

AVAILABLE WITH AND WITHOUT TRANSFORMER (see table)

- Electronic power circuit in the handle.
- Degree of protection IP55.
- Retractable, swivel and swiveling hook.
- Replaceable transparent cover

The model with built-in transformer allows the lamp to be operated with low voltage (24V), to ensure the highest level of safety for the user, as required by safety standards

24V lamps can also be powered in 24Vdc. There will be a loss of brightness of about 20%.

ATTENTION: use with voltages other than those indicated irreparably damages the power supply circuit and voids all warranties.

OPTIONAL ACCESSORIES AND SPARE PARTS

ART. 355

Fluorescent tube 11 W

ART. 528

Calotta trasparente per art. 328